
PRATT & WHITNEY® GG4 THREE SHAFT GAS TURBINE GENERATOR DRIVE APPLICATION CONTROL PACKAGE



MAY 2012



Simplified schematic showing a Pratt & WhitneyGG4 gas turbine generator drive application control package integrated into an advanced PLC-based control system.

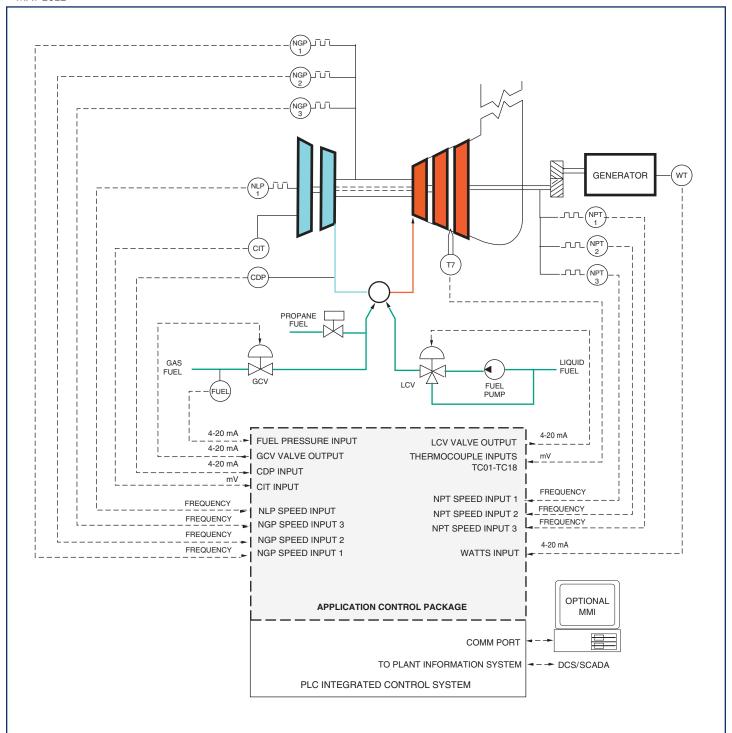

APPLICATION

The Petrotech Pratt & Whitney® GG4 application control package replaces older mechanical/hydraulic/electronic/pneumatic fuel regulators with a modern, reliable application control package which runs on an advanced PLC-based system. The control package for the gas turbine generator set provides dual fuel control for startup and nomal operations as well as for fuel changeover.

ADVANTAGES

• Hardware independent system:

Application control package's portability allows customer choice of PLC platform, reducing need for additional spare parts and training expenses. Available PLCs include General Electric, Siemens/TI, Allen-Bradley, and Modicon.

• Fault tolerant:

Control package is available on fault tolerant controllers for critical control applications.

• Simplified interface to DCS or SCADA:

Communication tasks are handled with a separate, dedicated module in the PLC, increasing data rate and simplifying network installation.

• Improved start-up reliability:

Fast loop sampling rate, combined with modern digital control techniques, improves steady-state setpoint control, and reduces overshoot during transients.

• Improved engine temperature monitoring and control:

Advanced statistical algorithms detect turbine hot/cold spots and automatically reject failed thermocouples.

Fail-safe features:

Redundant overspeeds; open/short monitoring of mA and thermocouples; readback monitoring of outputs, and special self-check features improve safety.

Non-proprietary interfaces:

Simple 4-20 mA, RTD, thermocouple, and dry contact I/O allow simple interface to existing sequence/protection logic unit, making low-cost partial upgrades practical, and system troubleshooting simple.

• Improved operator information with optional MMI:

Optional Man-Machine Interface MS Windows-based graphic operator interface displays system status, trending and data logging, which can be used as part of a preventive maintenance program.

• Reduced maintenance and calibration:

Startup and acceleration control valves schedules are integrated into the application control package, increasing reliability while decreasing system complexity.

SCOPE OF SUPPLY

Application control package for Pratt & Whitney® GG4 gas turbine generator drive system, includes:

Analog inputs, 4-20 mA:

- · Watts (load control).
- · Compressor discharge pressure (CDP).
- Fuel interstage pressure.

Analog inputs, frequency:

- · One (1) NLP Speed.
- · Up to Three (3) redundant NGP Speed.
- Up to Three (3) redundant NPT Speed.

Analog inputs, mV:

- · Compressor inlet temperature.
- T7 (up to 18 thermocouples).

Analog outputs, 4-20 mA:

- · Liquid fuel valve position setpoint.
- · Gas fuel control valve position setpoint.

Operating states:

- · Firing.
- Warm-up.
- · Accelerate.
- · Synchronize.
- · Load.

Status, alarms, and shutdowns:

- · Fault.
- · GP overspeed alarm.
- · GP underspeed shutdown.
- · GP overspeed shutdown.
- Redundant GP overspeed shutdown.
- △GP alarm.
- NPT overspeed alarm.
- NPT underspeed shutdown.
- · NPT overspeed shutdown.
- · Redundant NPT overspeed shutdown.
- △NPT alarm.
- High T7 alarm.
- High T7 shutdown.
- Low T7 shutdown.
- · Low T7 delayed alarm.
- · High T7 delayed shutdown.
- · Rejected thermocouple.
- Too few thermocouples shutdown.
- △T alarm.
- $\triangle T$ shutdown.
- Thermocouple spread alarm.
- · Thermocouple spread shutdown.
- · Turbine maximum limit.
- · Turbine minimum limit.
- NLP speed #1.
- NGP speed #1.
- NGP speed #2. (If used)
- NGP speed #3. (If used)



SCOPE OF SUPPLY - Continued

- NPT speed #1.
- NPT speed #2. (If used)
- NPT speed #3. (If used)
- T7 switch #1.
- · Manual.
- High firing fuel pressure shutdown.
- · Transmitter failure alarms.
- · Transmitter failure shutdowns.
- · Output failure shutdowns.
- · Control mode.

Controllers/special features:

- Start-up controller for fuel valve.
- · Fuel changeover.
- · NGP controller for fuel valve.
- NPT controller for fuel valve.
- T7 controller for fuel valve.
- · Acceleration control.
- · Combustion monitoring system.
- · Isochronous loadsharing.
- Bumpless transfer between droop and isochronous modes.

Ramps:

- Start-up and acceleration ramp.
- · Fuel changeover ramp.
- · Loading ramp.
- · Cooldown ramp.

Does not include:

- PLC hardware.
- Gas turbine sequencing and protection discrete logic.
- Generator sequencing and protection discrete logic.
- · Synchronizing and regulation equipment.
- End elements.

OPTIONS FOR COMPLETE CONTROL SYSTEM UPGRADE

- Gas turbine sequencing and protection discrete logic.
- Generator sequencing and protection discrete logic.
- · Communication interface to DCS or SCADA.
- · PLC hardware.
- Man machine interface unit with WonderWare InTouch® licensed software package.
- Complete custom engineered control panel, factory tested and ready to install.
- Fuel control valve system upgrade.
- Turbine performace calculations.Bleed valve actuator system upgrade.
- · Thermocouple upgrade.
- Synchronizing and regulation equipment.
- · Vibration system upgrade.
- · Installation and commissioning.
- · Training.

Petrotech, Inc. 151 Brookhollow Esplanade New Orleans, Louisiana 70123 Phone: (504) 620-6600 Fax: (504) 620-6601 Email: info@petrotechinc.com Website: www.petrotechinc.com